


Trellex Dust Control

Take the dust and noise out of materials handling

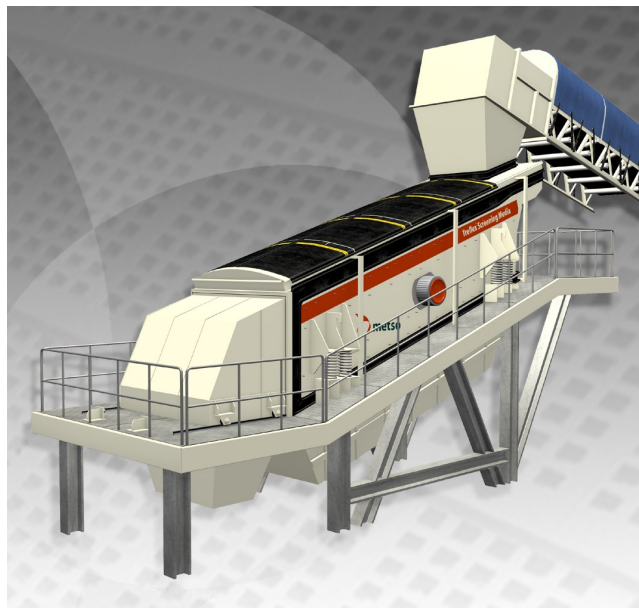


 Trellex Screening Media

Description

Dust creates big problems! Modern aggregate operations and mineral processing facilities generate large amounts of dangerous dust. Not only is dust a health hazard, it also accelerates wear and tear on equipment and complicates maintenance work. Dust increases the risk of corrosion and the cost of maintenance.

With the Trellex Dust Control system there is virtually a 100 % dust seal. With simple, standardized components, we customize the dust sealing system to the equipment.

The Trellex Dust Control system also reduces noise considerably - in many cases up to 10 to 12 decibels.

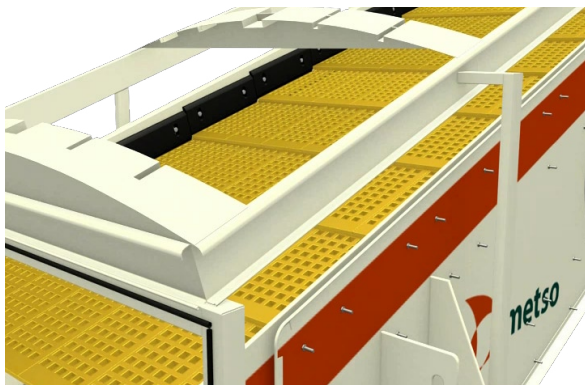


Picture 1. Example of the top canopy construction with arches

Function and benefits

Other benefits with the Trellex Dust Control system, in addition to taking care of dust, are









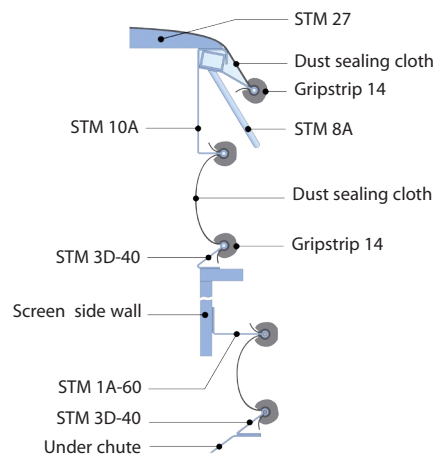




- better work environment
- reduced wear and corrosion
- safe, fast and easy maintenance
- reduced noise



Picture 2. Section (typical) of dust sealed screen

www.metso minerals.com


Trellex Dust Control Components

Component	Dimension mm [inch]	
STM 3A-40	L = 3600 [141.73]	
STM 1A-60	L = 3600 [141.73]	
STM 3B-40	L = 3600 [141.73]	
STM 3D-40	L = 3600 [141.73]	
STM 1-60	L = 3600 [141.73]	
STM 1-95	L = 3600 [141.73]	
STM 17-40	110 × 110 [4.3 × 4.3]	
STM 17-60	110 × 110 [4.3 × 4.3]	
STM 19-40	110 × 110 [4.3 × 4.3]	
STM 19-60	110 × 110 [4.3 × 4.3]	
STM 4-40	110 × 110 [4.3 × 4.3]	
STM 4-60	110 × 110 [4.3 × 4.3]	
STM 4B-40	110 × 110 [4.3 × 4.3]	
STM 4B-60	110 × 110 [4.3 × 4.3]	
STM 22B-40	110 × 110 [4.3 × 4.3]	
STM 2-40	110 × 110 [4.3 × 4.3]	
STM 2-60	110 × 110 [4.3 × 4.3]	
STM 20-40	130 × 130 [5.1 × 5.1]	
STM 10A	L = 3600 [4.3 × 4.3]	
Std	1350 × 20000 × 2	
AF	1350 × 20000 × 2	
HT	1350 × 20000 × 2	

[53.1 × 787.4 × 0.078]

Std: Standard dust sealing cloth, -40 to +50°C [-40 to +122°F]
 AF: Anti-flame dust sealing cloth, -30 to +70°C [-22 to +158 °F]
 HT: High temp. resistant dust sealing cloth, -30 to 130°C [-22 to +266°F]

Component	Dimension mm [inch]	
STM 27D END	L < 1500 [59.1]	
STM 27D END	1500 < L < 1800	
STM 27D END	L > 1800 [70.9]	
STM 27D MID.	L < 1500 [59.1]	
STM 27D MID.	1500 < L < 1800	
STM 27D MID.	L > 1800 [70.9]	
STM 28A	60 × 40 × 3 :3000 [2.36 × 1.57 × 0.12 :118.1]	
STM 28B	80 × 40 × 3:3000 [3.15 × 1.57 × 0.12 :118.1]	
STM 28D	25 × 25 × 2:1350 [0.98 × 0.98 × 0.08 :118.1]	
Gripstrip 14	L = 1350 [53.1]	
Gripstrip C 14-55V	150 × 150 [5.9 × 5.9]	
Gripstrip C 14-55H	150 × 150 [5.9 × 5.9]	
STM 9	L = 1350 [53.1]	
STM 8A	L = 1350 [53.1]	

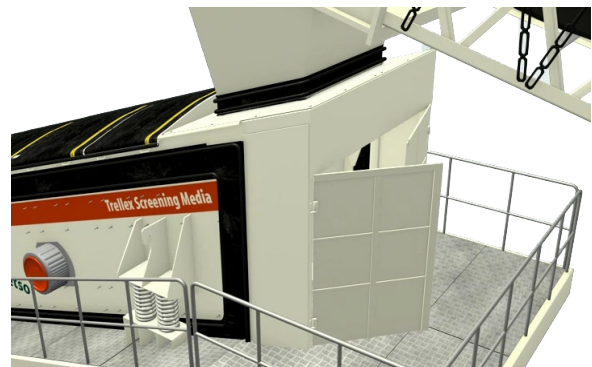

Picture 3. There are several ways to assemble a dust control system. Depending on the conditions, the profiles can easily be adapted for every type of screen. Contact Trellex Screening Media Support for a dust seal proposal.



Metso Minerals, Trellex Screening Media
 1402 E. Veterans Memorial Parkway
 Warrenton, MO 63383, USA.
 Tel: +1 636 456 8200 Fax: +1 636 456 4416
 screeningmedia.nam@metso.com

Metso Minerals, Trellex Screening Media
 P.O. Box 74, SE-231 21 Trelleborg, Sweden.
 Tel: +46 410-525 00 Fax: +46 410-526 04
 screeningmedia@metso.com www.metsominerals.com
 The above information is a general description only, it is not guaranteed and contains no warranties of any kind.